



REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A	INITIAL RELEASE	5/21/2011	BS

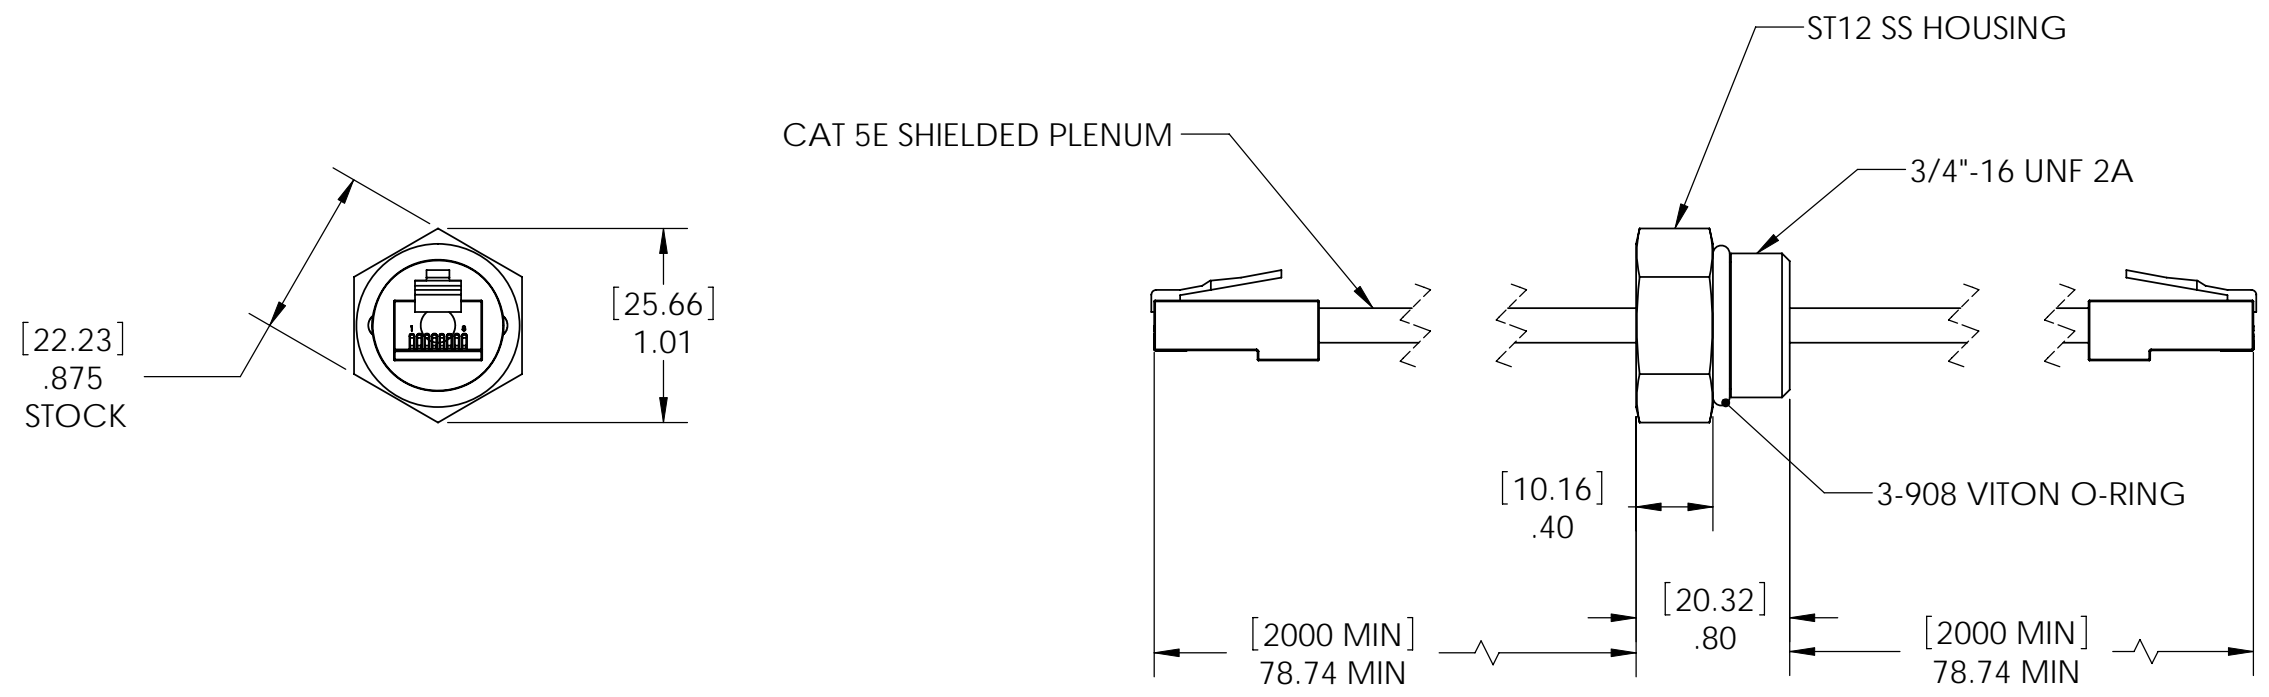

- NOTES:
1. HELIUM LEAK TEST @ 1 ATM 1X10⁻⁸ STD-CC/SEC OR BETTER, VACUUM ON THREAD SIDE.
 2. HYPOT 100VDC 100 MEGOHMS .01 SECOND MINIMUM.
 3. SEAL OPERATING TEMPERATURE -20C TO 125C (WIRE 80C MAXIMUM).
 4. DIMENSIONS ARE INCHES [MILLIMETERS], MILLIMETERS SHOWN FOR REFERENCE ONLY.
 5. CUSTOM SIZES, WIRE OR FIBER OPTIC CONFIGURATIONS, & TESTS AVAILABLE, PLEASE CONTACT RHS FOR MORE INFORMATION.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	 RELIABLE HERMETIC SEALS Jersey City, NJ, USA ■ 888-747-3250	
DIMENSIONS ARE IN INCHES		DRAWN	MM		5/21/11
TOLERANCES:		CHECKED	BS		5/21/11
FRACTIONAL ±1/16		ENG APPR.	MM		5/12/11
ANGULAR ±.5		MFG APPR.			
X. ±1 .X ±.1		Q.A.			
.XX ±.02 .XXX ±.005		PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF RELIABLE HERMETIC SEALS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF RELIABLE HERMETIC SEALS IS PROHIBITED.			
INTERPRET GEOMETRIC TOLERANCING PER:		TITLE:		CABLE SEAL ST12 316SS (1) PLENUM STP CABLE RJ45 2m 2m	
MATERIAL SEE ABOVE		SIZE	DWG. NO.	REV	
FINISH N/A		B	60013	A	
DO NOT SCALE DRAWING		SCALE: 1:1	WEIGHT:	SHEET 1 OF 1	