


8 7 6 5 4 3 2 1

REVISIONS				
ZONE	REV.	DESCRIPTION	DATE	APPROVED
	A	INITIAL RELEASE	22NOV2017	BS

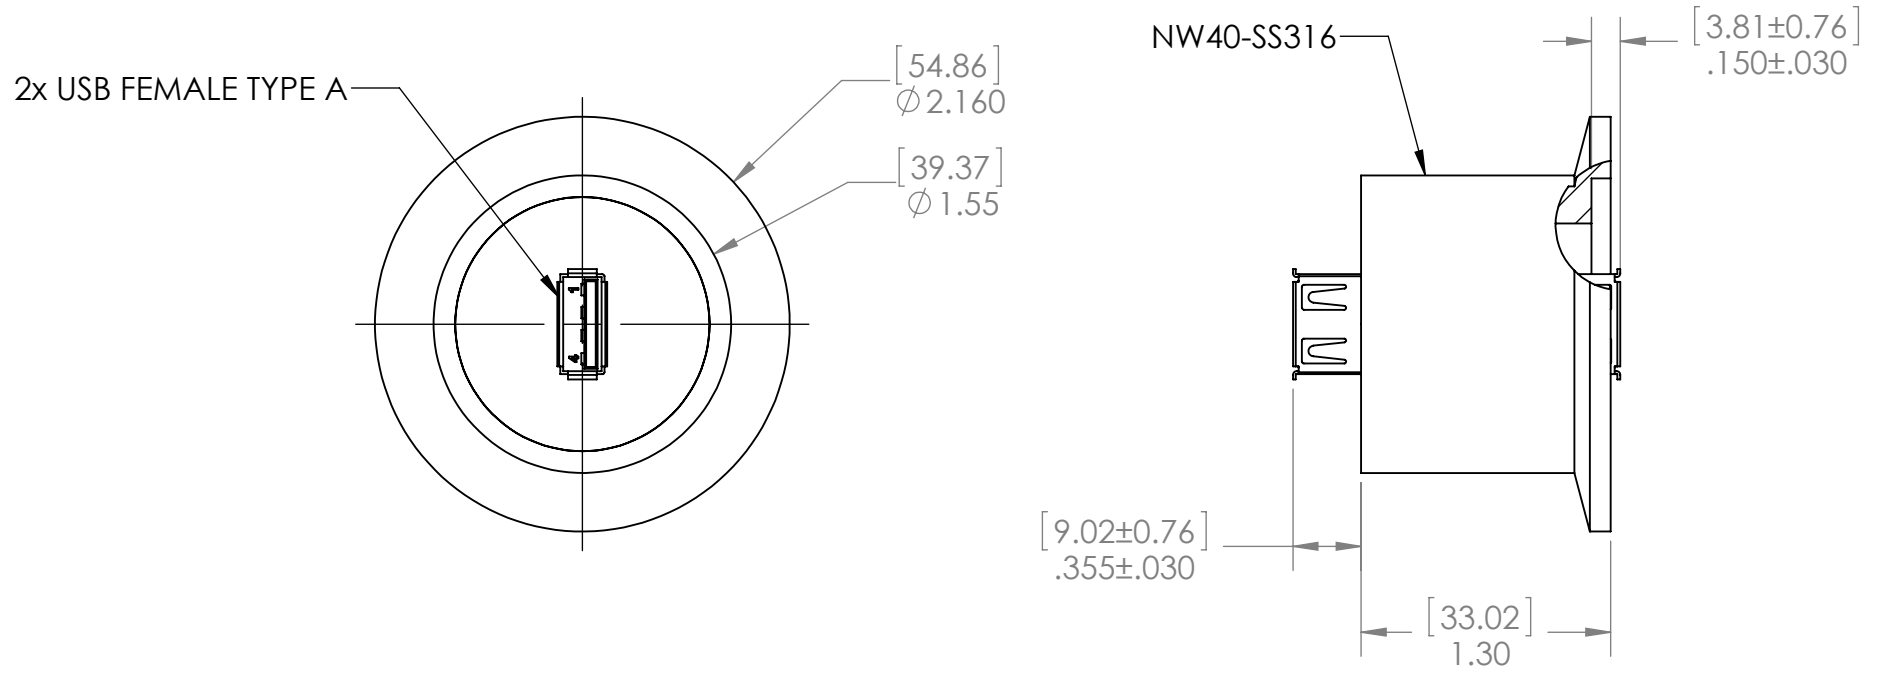

1x PIN OUT	
USB ATM	USB VACUUM
1	1
2	2
3	3
4	4

D
C
B
A

D
C
B
A

- NOTES:
1. HELIUM LEAK TEST @ 1 ATM 1X10⁻⁸ STD-CC/SEC OR BETTER, VACUUM ON THE FLANGE SIDE.
 2. HYPOT 100VDC 100 MEGOHMS .01 SECOND MINIMUM CONDUCTOR TO CONDUCTOR AND HOUSING.
 3. SEAL OPERATING TEMPERATURE -20C TO 130C (CONNECTOR LIMITED TO 85C).
 4. DIMENSIONS ARE INCHES [MILLIMETERS], MILLIMETERS SHOWN FOR REFERENCE ONLY.
 5. CUSTOM SIZES, WIRE OR FIBER OPTIC CONFIGURATIONS, & TESTS AVAILABLE, PLEASE CONTACT RHS FOR MORE INFORMATION.

UNLESS OTHERWISE SPECIFIED:	NAME	DATE	
DIMENSIONS ARE IN INCHES	DRAWN	MM 22NOV17	
TOLERANCES:	CHECKED	BS 22NOV17	
FRACTIONAL ±1/16	ENG APPR.	MM 22NOV17	
ANGULAR ±.5	MFG APPR.		
X. ±1 .X ±.1	Q.A.		TITLE: CONNECTOR SEAL NW40 316SS (1)USB A RCPT
.XX ±.02 .XXX ±.005	PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF RELIABLE HERMETIC SEALS. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF RELIABLE HERMETIC SEALS IS PROHIBITED.		SIZE DWG. NO. REV
INTERPRET GEOMETRIC TOLERANCING PER:	MATERIAL NOTED		B 80161USB A
DO NOT SCALE DRAWING			SCALE: 1:1 WEIGHT: SHEET 1 OF 1

8 7 6 5 4 3 2 1